

Datasheet for nonwoven - PROCOTEX

Delax Nonwoven

Product Description	Delax Nonwoven 320 gram/m ² , laminated with PP on one side
Properties	Nominal values
Grams/m ²	320
NRC (acoustic resistance)	27%
Air resistance (Ns/m ³) Iso 9053	3580
Fire resistance	Not tested and not applicable
Company	PROCOTEX www.procotex.com
Contact person	Nicolas Douchy n.douchy@procotex.com

Demonstrator: Delax Nonwoven 320 gram/m²



Environmental performance of Delax Nonwoven

In the LCA analysis:

- the functional unit was 1 kg of produced needlefelt (nonwoven)
- the collection of the mixed bulky waste was included (based on the data from IMOG)
- the fragmentation/separation of the mixed bulky waste was included (based on the data from ECOFRAG/VANHEEDE)
- the data on the production process was provided by PROCOTEX
- for the treatment of waste coming from technological processes, the data from the SimaPro database were used
- the benefits of recycling were taken into account
- the energy mix for Europe without Switzerland was used

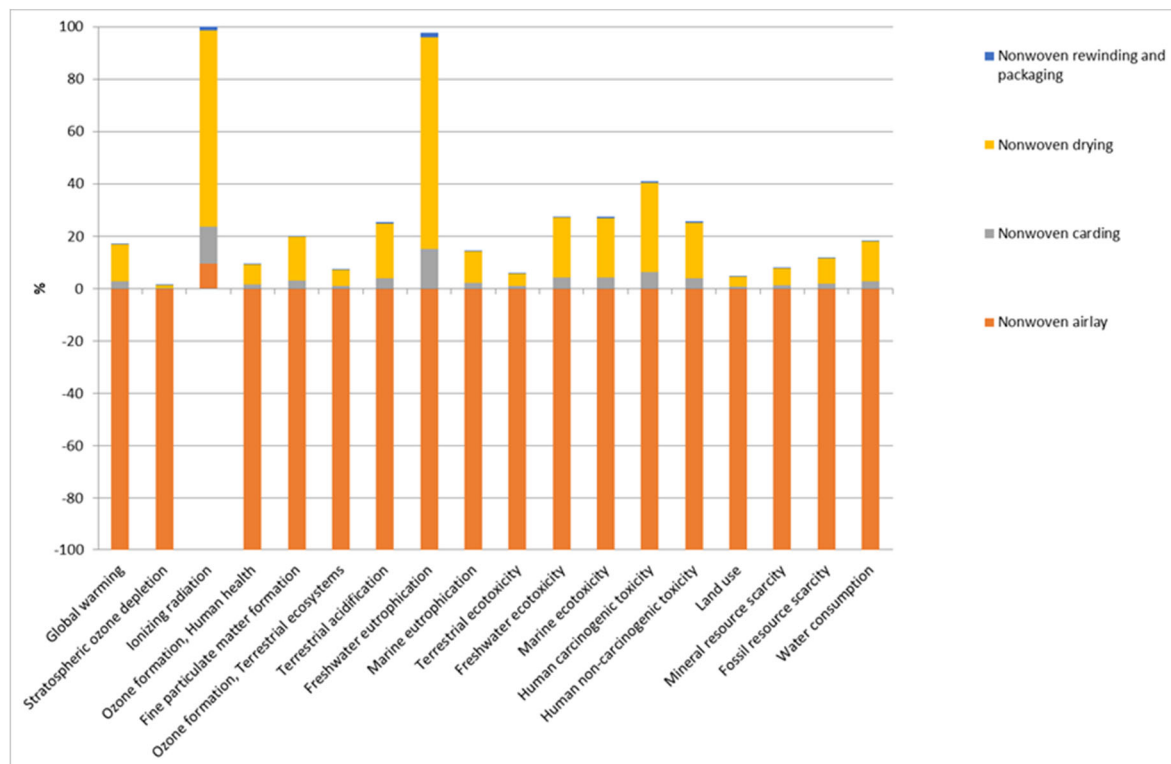


Figure. Results of LCA analysis for 1 kg of produced needlefelt (nonwoven)